

Labilis Rings Suspension

DESIGN | PAOLO CASTELLI



Finishes of the above picture



Metal
Varnish
Black
RAL 9004



Metal Finish
Matt
Bronzed
Brass



Rosone cilindrico in metallo con alimentatore interno, adatto per installazione a soffitto (optional). Metal cylindrical rose holding local drivers, suitable for ceiling installation (optional).
Dim. Ø9 x h 20cm

Tre anelli di diverso diametro installabili singolarmente o in composizione da 4, 7 e 10 anelli. L'anello in metallo è finitura nero opaco con diffusore di luce LED in policarbonato opalino bianco perimetrale. Ogni anello monta uno spot in ottone finitura bronzo ottone opaco. Gli anelli presentano tre cavi di sospensione, di cui uno di alimentazione. Optionals su richiesta: anelli dimmerabili; rosone cilindrico in metallo con alimentatore interno, adatto per installazione a soffitto.


Three rings of different diameters can be installed separately or as composition (4, 7, 10 rings). The metal ring is in satin black finish, with light diffuser in white opal polycarbonate along the perimeter. Each ring carries a LED spot in matt brass bronze finish and has three suspension cables, one of which is a power supply one. Optionals available on request: dimmable rings; metal cylindrical rose holding local driver, suitable for ceiling installation.

Ø27

TECHNICAL SHEET

LABILIS Ø27

Light source: Strip LED 140 LED/m + spot LED
Total power: 7,3W - Strip LED 14,4W/m; spot 4,2W
Voltage: 230V
Rated luminous flux spot: 330 lm
Rated luminous flux strip LED: 1092 lm
Colour temperature: 2700°K
Colour rendering index: 90
Dimmer function: Yes - only for ring
Weight: 3 Kg
Standard cable length: 2m

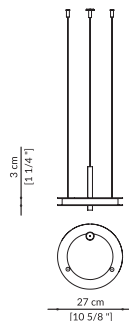

RING Ø27 | ILL.LABI.231

1 ring Ø27 in metal matt black varnished and LED spot in matt bronzed brass. Remote drivers

OPTIONAL * | OPT.ILL.LABI.CEIL


Metal cylindrical rose holding local driver, suitable for ceiling installation

Ø43

TECHNICAL SHEET

LABILIS Ø43

Light source: Strip LED 140 LED/m + spot LED
Total power: 9,7W - Strip LED 14,4W/m; spot 4,2W
Voltage: 230V
Rated luminous flux spots: 330 lm
Rated luminous flux strip LED: 1755 lm
Colour temperature: 2700°K
Colour rendering index: 90
Dimmer function: Yes - only for ring
Weight: 4,5 Kg
Standard cable length: 2m

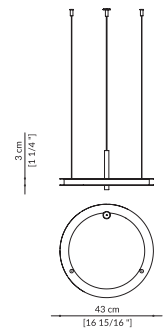

RING Ø43 | ILL.LABI.221

1 ring Ø43 in metal matt black varnished and LED spot in matt bronzed brass. Remote drivers

OPTIONAL * | OPT.ILL.LABI.CEIL

Metal cylindrical rose holding local driver, suitable for ceiling installation

Labilis Mega Ring Suspension

DESIGN | PAOLO CASTELLI



Finishes of the above picture



Metal
Varnish
Black
RAL 9004




Metal Finish
Matt
Bronzed
Brass



Rosone cilindrico in metallo con alimentatore interno, adatto per installazione a soffitto (optional). Metal cylindrical rose holding local drivers, suitable for ceiling installation (optional). Dim. Ø9 x h 20cm

Un nuovo alfabeto grafico fatto di essenziali elementi geometrici che disegnano nello spazio contemporanee forme di luce. La famiglia Labilis accoglie Labilis Mega Ring, sistema d'illuminazione a sospensione caratterizzato da dimensioni estremamente generose, in armonioso contrasto con il suo profilo essenziale. L'anello in metallo, finitura Nero opaco con diffusore di luce LED in policarbonato opalino Bianco perimetrale, è impreziosito da quattro spot in ottone finitura Bronzo opaco.

A new graphic alphabet made of essential geometric elements that draw contemporary forms of light in space. The Labilis family welcomes Labilis Mega Ring – a suspension lighting system characterized by extremely generous dimensions harmoniously contrasting with its essential profile. The main metal ring, featuring matt Black finish with perimeter White opal polycarbonate LED light diffuser, is embellished with four brass spots in brass Bronze matt finish.

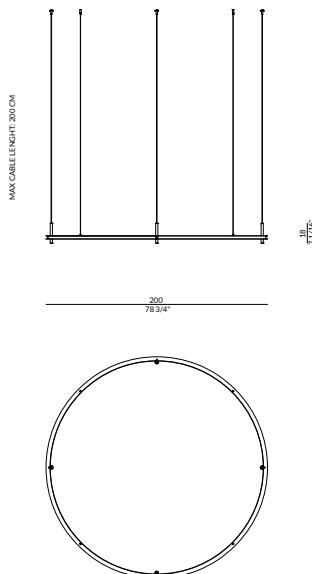

TECHNICAL SHEET

LABILIS MEGA RING

Light source: Strip LED 140 LED/m + spot LED

Total power: 103,20 W – (Strip LED 86,4W - nr. 4 spot 16,8W)

Voltage: 230V

Rated luminous flux spots: 1320 lm

Rated luminous flux strip LED: 9342 lm

Colour temperature: 2700°K

Colour rendering index: 90

LABILIS MEGA RING | ILL.LABI.400

1 ring Ø200 in metal matt black varnished. Led spot in matt bronzed brass. Remote drivers

OPTIONAL * | OPT.ILL.LABI.CEIL


Metal cylindrical rose holding local driver, suitable for ceiling installation

Labilis Composition Suspension

DESIGN | PAOLO CASTELLI



Finishes of the above picture



Metal Varnish
Black
RAL 9004



Metal Finish
Matt
Bronzed
Brass



Rosone cilindrico in metallo con alimentatore interno, adatto per installazione a soffitto (optional). Metal cylindrical rose holding local drivers, suitable for ceiling installation (optional). Dim. Ø9 x h 20cm

Un nuovo alfabeto grafico fatto di essenziali elementi geometrici che disegnano nello spazio contemporanee forme di luce. Tre anelli di diverso diametro installabili singolarmente o in composizione da 4, 7 e 10 anelli. L'anello in metallo è in finitura nero opaco con diffusore di luce LED in policarbonato opalino bianco perimetrale. Ogni anello monta uno spot in ottone finitura bronzo ottone opaco. Gli anelli presentano tre cavi di sospensione, di cui uno di alimentazione. Optional su richiesta: anelli dimmerabili e rosoni cilindrici in metallo con alimentatore interno, adatto per installazione a soffitto.


A new graphic alphabet consisting of essential geometric elements that create contemporary light forms in the space. Three rings in different diameters can be installed separately or as composition (4, 7, 10 rings). The metal ring is in satin black finish, with light diffuser in white opal polycarbonate along the perimeter. Each ring carries a LED spot in matt brass bronze finish. Each ring has three suspension cables, one of which is a power supply one. Optionals available on request: dimmable rings; metal cylindrical roses holding local drivers, suitable for ceiling installation.

4 RINGS

TECHNICAL SHEET

4 RINGS

Light source: Strip LED 140 LED/m + spot LED (4X)
Total power: 35W - Strip LED 14,4W/m; spot 4,2W (10X)
Voltage: 230V
Rated luminous flux spots: 1320 lm
Rated luminous flux strip LED: 6357 lm
Colour temperature: 2700°K
Colour rendering index: 90
Dimmer function: Yes - only for rings
Cables length: 2mt
Weight: 18 Kg
Standard cable length: 2m

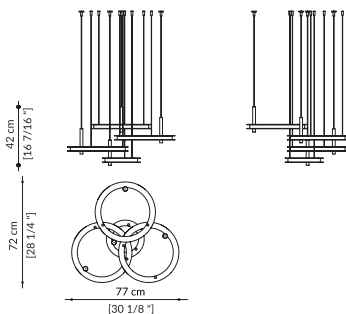

4 RINGS | ILL.LABI.230

1 ring Ø27 + 3 rings Ø43 in metal matt black varnished and LED spots in matt bronzed brass. Remote drivers

OPTIONAL * | OPT.ILL.LABI.CEIL


4 metal cylindrical roses holding local drivers, suitable for ceiling installation

7 RINGS

TECHNICAL SHEET

7 RINGS

Light source: Strip LED 140 LED/m + spot LED (7X)
Total power: 77W - Strip LED 14,4W/m; spot 4,2W (7X)
Voltage: 230V
Rated luminous flux spots: 2310 lm
Rated luminous flux strip LED: 14928 lm
Colour temperature: 2700°K
Colour rendering index: 90
Dimmer function: Yes - only for rings
Cables length: 2mt
Weight: 40 Kg
Standard cable length: 2m

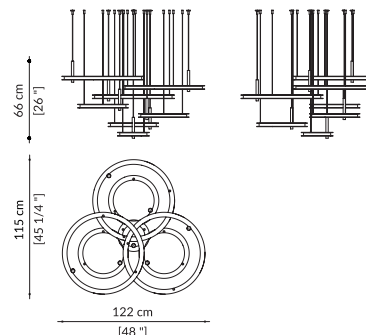

7 RINGS | ILL.LABI.220

1 ring Ø27 + 3 rings Ø43 + 3 rings Ø70 in metal matt black varnished and LED spots in matt bronzed brass. Remote drivers

OPTIONAL * | OPT.ILL.LABI.CEIL

N°7 metal cylindrical roses holding local drivers, suitable for ceiling installation